


MONUMENT RECORD

Corner ID: **Wash_C01.75**

1/32 Corner

Section 6-T10N-R01W, 2nd P.M.



Washington Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)

(#10341) Found dome shaped possibly granodiorite or another type of metamorphic Stone 6"x8" 0.2' above ground, at the West base of a 17" diameter Shagbark Hickory tree at old north-south and west fence intersection.

MONUMENT LOCATION SKETCH:

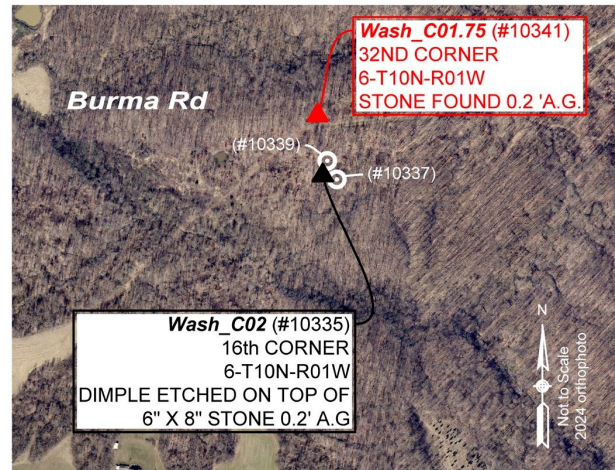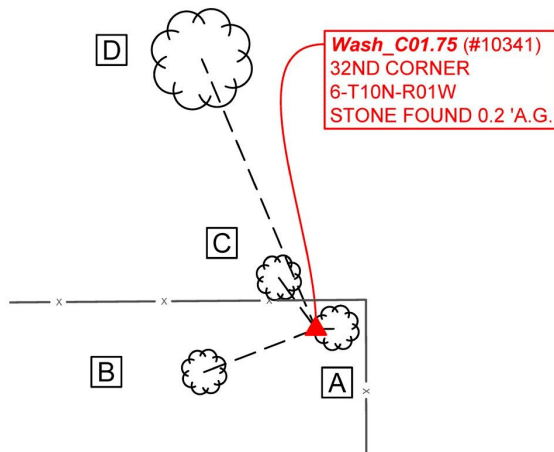

WITNESS MONUMENT TIES: Describe at least three new BT's (Bearing Trees) and/or witness objects established or work done to preserve existing evidence. BT diameters are noted as dbh (diameter at breast height) and are measured approximately 4.5' above ground. Bearings and Distances are measured from the monument to the center of the BT. Bearings and Distances to witness ties were measured with a Compass and Cloth tape.

ID	Bearing	Distance	Description
A	S89°E (Compass)	1'	17" diameter Shagbark Hickory tree at old north-south and west fence corner.
B	S69°W (Compass)	20.5'	Mag nail in washer set in hack 0.4' above ground on North side of 3" diameter Sassafras tree.
C	N36°W (Compass)	10.8'	Mag nail in washer set in hack 0.5' above ground on East side of 9" diameter Shagbark Hickory tree
H	N23°W (Compass)	50.0'	99" circumference or 31.5" diameter hollow Beech tree.

MONUMENT ACCESSORIES

Other survey grade monuments that were located in the vicinity and their relation to the monument. Witnesses noted as a Rebar Lite are a 5/8" diameter by 16" polycarbonate rod with a 1-1/2" mag nail in top and yellow plastic cap stamped "MONROE COUNTY WITNESS POINT" set 0.1 foot below grade unless otherwise noted.

Geodetic coordinates in this table are provided in the format Northing, Easting

(#10337)	S10° 07' 40"E	367.82'	N:1488996.6365' E:3099385.8617' Rebar Lite
(#10339)	S10° 38' 34"E	276.49'	N:1489086.9957' E:3099372.2449' Rebar Lite
(#10335)	S04° 56' 41"E	342.18'	N:1489017.8228' E:3099350.6754' Dimple placed on top of 0.75' north-south by 0.3' east-west cut Limestone found with top 0.35' above ground



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 1 of 4

MONUMENT RECORD

Corner ID: **Wash_C01.75**

1/32 Corner

Section 6-T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana




PHOTO IDENTIFIED: Photo Date: 09/09/2022



Photo Orientation & Description: From Above.



Photo Orientation & Description: From West Looking East

EXISTING SURVEY HISTORY Include as much detail and history of the corner as known at the time of perpetuation

ORIGINAL GOVERNMENT SURVEY:

This corner was not set in the original Government survey.

ORIGINAL CORNER ESTABLISHMENT:

Date Surveyed: August, 1899 By: Eugene Bowers Monroe County Surveyor.

Where filed or recorded: Legal survey Book 2. Page 558.

Original monument: Not noted

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Beech	8"	N23°W	76 Links
B. Oak	4"	N10°W	68 ½ Links

Notes: The Original 8" Beech is the 31.5" Hollow Beech located at H this survey.

SUBSEQUENT CORNER RESTORATION: None found in Legal Survey books.

OTHER SURVEY HISTORY: Include details such as surveyor name, date, recording info, monument description, etc.

DocumentDate	SurveyID	Surveyor	Description	InstrumentNo
8/1/1899	RSID004039	Bowers, Charles	Legal Survey Book 2, Page 558	
3/26/2019	RSID002785	Gwinn, Jess A.	Ames Boundary survey	2019006845.IN

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: Include, search area or areas, search procedure, etc.

Date of Field work/Search: 09/09/2022 By: JG & HJ Monument Found: Stone BTs or Reference Objects Found: **Yes**, an original witness tree was found, additional witnesses established. Project # Washington Monuments. Field Book: 55 page 7 Notes:



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 2 of 4


MONUMENT RECORD

Corner ID: **Wash_C01.75**

1/32 Corner

Section 6-T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana



ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 08/21/2025 *By:* MES & JMG *Monument Found:* Stone *BTs or Reference Objects Found:* Yes, an original witness tree was found, additional witnesses from 2022 project were checked. *Project #* 25-003 *Field Book:* 59 page 2 *Notes:*

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

Stone is at an old north-south and west fence intersection. We reached the corner by driving to the end of a dead-end road that leads to a house at 1548 West Burma Road Gosport In. Then walking West to the corner from there.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

GPS coordinates were established on the stone. Trees were located for visual reference. We also tied the Stone to another nearby Stone (Wash_C02) and Rebar lites near said Wash_C02. A Monroe County witness monument sign was nailed to witness A, above and facing the stone.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The stone was found and is presumed to be the monument set by Eugene Bowers Monroe County Surveyor in August 1899, documented in Legal Survey Book 2, page 558. This survey appears to represent the original subdivision of this Section and this monument appears to represent the originally established and historically accepted location of a parcel corner established in said survey with negligible uncertainty in my opinion.

GEODETIC COORDINATES: *Northing:* 1489358.7', *Easting:* 3099321.2'

BASIS OF GEODETIC COORDINATES:

The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover and/or with a Sokkia Set 510 Total Station radially from points located with GPS. Distances obtained with GPS have not been adjusted to ground. To adjust grid distances to ground distances multiply them by a scale factor of 1.000035974.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 6 Township 10 North Range 1 West by Michael E. Sheppard of the Monroe County Surveyor's Office.




MONUMENT RECORD

Corner ID: **Wash_C01.75**

1/32 Corner

Section 6-T10N-R01W, 2nd P.M.

Washington Township, Monroe County, Indiana



CERTIFICATIONS:



Michael E. Sheppard

Date: 1/20/2026

Michael E. Sheppard

State of Indiana

Professional Surveyor

No. 20100021



Trohn Enright-Randolph

Date: 1/20/2026

Trohn Enright-Randolph

Monroe County Surveyor



Donna K. Smith

Accepted by the Monroe County
Surveyor Review Board on

1/20/2026



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 4 of 4